




DOUBLE ACTION GLASS FILLERS

The Only Fillers With Continuous Flow Position

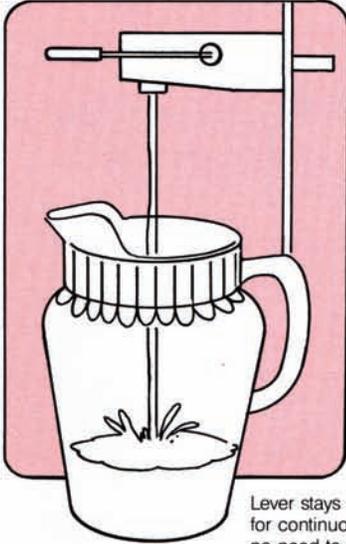

Lever stays in up position for continuous flow... no need to hold it.

KEY FEATURES

- Push back lever for fast glass filling.
- Continuous flow position standard.
- Gleaming chrome-plated exposed surfaces.
- Stainless steel poppet & cam assures lifetime dependability.
- Adjustable spout regulates water flow.

MODEL MF100WX - Wall model

MODEL MF100X Pedestal model

MODEL MF100SX - Complete water station with faucet - S/S drip pan - outlet and drop in strainer.

MODEL S-250 - Stainless Steel drip pan & outlet with drop in strainer.

MODEL MF-105X - 5" center to center pedestal dimensions.

MODEL MF100X
PEDESTAL TYPE

MODEL MF100WX - Wall model

3-5/8" (92mm) | 3" (76.2mm)

No. 650BT Adaptor 1/4" SAE male optional at no extra charge

MODEL MF100SX
WATER STATION

10 1/2" (266.8mm) | 10 3/8" (263.6mm)

S-250 DRIP PAN DIMENSIONS

5" center to center spout to pedestal dimensions.

1/2" IPS (13/16" dia. shank 3" long)

5 13/16" (147.7mm) wide x 4 15/16" (125.4mm) deep

Heights of threads other than standard optional.

NSF