



## GLO-RAY® HEATED SHELVES

Models GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top, and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature.

### FLEXIBILITY

Ideal for pass-through areas, buffet lines, or as a heated work shelf.

Model GRS features a rocker switch with indicator light and an adjustable thermostat ranging from 140° to 180°F (60° to 82°C). Surface-mounted blanket-type elements distribute heat under the entire stainless steel surface. All models are shipped factory assembled and include a 6' (1829 mm) cord and plug attached, ready to use. Available in seven *Designer* colors and with a hardcoated surface on standard depth models.

### QUALITY

The following features assure the finest performance for years to come:

- Models feature a thermostatically-controlled heated base to extend the holding times of most food.
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm).



Model GRS-30-I with accessory pan rail and food pans



Model GRAH-30 with optional *Designer* color and infinite switch and accessory C-Leg stand over Heated Shelf model GRS-24-I in optional *Designer* color

BLANKET ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR ONE YEAR.



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
 (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
 www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. GRS Spec Sheet

Printed in U.S.A.  
 April 2009



# GLO-RAY® HEATED SHELVES

Models GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

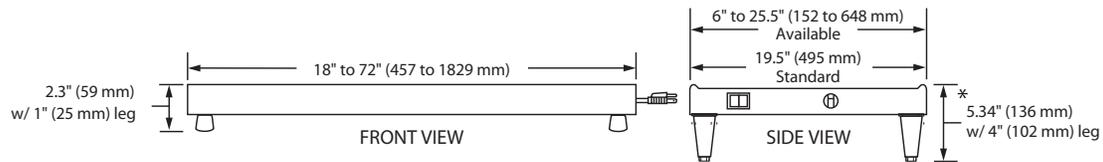

## SPECIFICATIONS

Model	Watts	Width	Shipping Weight
GRS-18-I	250	18" ( 457 mm)	16 lbs. ( 7 kg)
GRS-24-I	350	24" ( 610 mm)	20 lbs. ( 9 kg)
GRS-30-I*	450	30" ( 762 mm)	25 lbs. (11 kg)
GRS-36-I	550	36" ( 914 mm)	28 lbs. (13 kg)
GRS-42-I†	600	42" (1067 mm)	32 lbs. (15 kg)
GRS-48-I†	700	48" (1219 mm)	36 lbs. (16 kg)
GRS-54-I†	800	54" (1372 mm)	42 lbs. (19 kg)
GRS-60-I†	900	60" (1524 mm)	44 lbs. (20 kg)
GRS-66-I†	1000	66" (1676 mm)	50 lbs. (23 kg)
GRS-72-I†	1100	72" (1829 mm)	56 lbs. (25 kg)

\* Indicates models that accommodate multiple food pans: 30" (762 mm) = 2 pans, 42" (1067 mm) = 3 pans, 54" (1372 mm) = 4 pans, and 66" (1676 mm) = 5 pans.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

## DIMENSIONS

GRS (Standard Depth): Model shown is 18"-72"W x 19.5"D x 2.3"H\* (457-1829 x 495 x 59 mm).

\*Add 3" (76 mm) to height when using 4" (102 mm) legs.

## GRS Models are available in depths of:

Model	Depths	Model	Depths
A	6" (152 mm)	G	15.75" (400 mm)
B	7.75" (197 mm)	H	17.5" (445 mm)
C	9.75" (248 mm)	I	19.5" (495 mm)
D	12" (305 mm)	J	21.5" (546 mm)
E	13.75" (349 mm)	K	23.5" (597 mm)
F	15.5" (394 mm)	L	25.5" (648 mm)


## VOLTAGE

120 volts, single phase only, (uses NEMA 5-15P).  
Export voltages available.

## CORD LOCATION

Center of side with switch.

## PLUG CONFIGURATIONS



## OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, and Antique Copper
- Hardcoated Surface for Standard Depth 19.5" (495 mm) Models

## ACCESSORIES

- 4" (102 mm) Adjustable Legs (Standard on units over 36" (914 mm) in width)
- Slant Leg Kit (Models 12" (305 mm) deep or deeper)
- Pan Rail (19.5" (495 mm) deep models only)

## PRODUCT SPECS Infrared Foodwarmer

The Heated Shelf shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the Shelf shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall

width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.

Accessories shall include 4" (102 mm) adjustable legs, slant leg kit, and pan rail.