



Project:

Item Number:

Quantity:

INDUCTION RANGE: MIRAGE® COMMERCIAL COUNTERTOP



Mirage® 59650 Commercial Countertop Induction Range

DESCRIPTION

The ultra-low profile, portable countertop induction range is designed for use in light to medium duty front-of-the-house cooking.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction ranges are equipped with a variety of safety features including:

- ☐ Over-heat protection
- ☐ Small-article detection
- ☐ Pan auto-detection function
- ☐ Empty-pan shut-off
- ☐ Safety auto-shut-off function

Agency Listings



This device
complies
with Part 18
FCC Rules.

MODELS

59650	1.8 kW @ 230V (Schuko plug)
59651	1.8 kW @ 230V (UK plug)
59652	1.8 kW @ 230V (China)

FEATURES

- ☐ 100 power levels with optimum power output to a wide variety of induction-ready cookware.
- ☐ 1-100 power levels or °F/°C temperature level controls.
- ☐ Easy to read digital readout for power level.
- ☐ 1-180 minute timer.
- ☐ Stainless steel case and ceramic top.
- ☐ Patent-pending low profile design and complete portability.
- ☐ Variable speed knob for fast temperature adjustment.
- ☐ Rubber feet to prevent slipping of appliance.
- ☐ Unit comes with cord and plug and does not require hard wiring.
- ☐ Full one-year parts and labor warranty.
- ☐ Ranges display HOT when unit is turned off, if the counter is still hot.

IMPORTANT

- ☐ This appliance is intended for use with induction-ready cookware.
- ☐ All models require adequate unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- ☐ Countertop models require a minimum clearance of 3 inches (7.6 cm) at the rear and 1 inch (2.5 cm) at the bottom.

Approvals

Date:



Setting
the Standard



www.vollrathco.com

INDUCTION RANGE: MIRAGE® COMMERCIAL COUNTERTOP

MODELS	59650	1.8 kW @ 230V (Schuko plug)
	59651	1.8 kW @ 230V (UK plug)
	59652	1.8 kW @ 230V (China)

DIMENSIONS

- ☐ Overall dimension: 14" wide x 15¼" deep x 3" high (35.56 cm x 38.74 cm x 7.62 cm)
- ☐ Shipping container dimension: 17¾" wide x 17" deep x 7¼" high (45.09 cm x 43.18 cm x 18.42 cm)
- ☐ Weight of unit: 12.75 lbs (5.78 kg)
- ☐ Shipping weight: 15.70 lbs (7.12 kg)
- ☐ Dimensions shown in inches (cm)

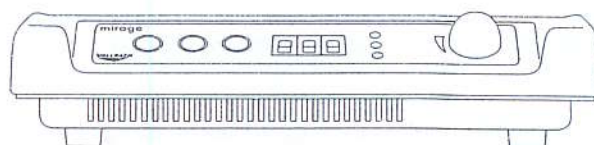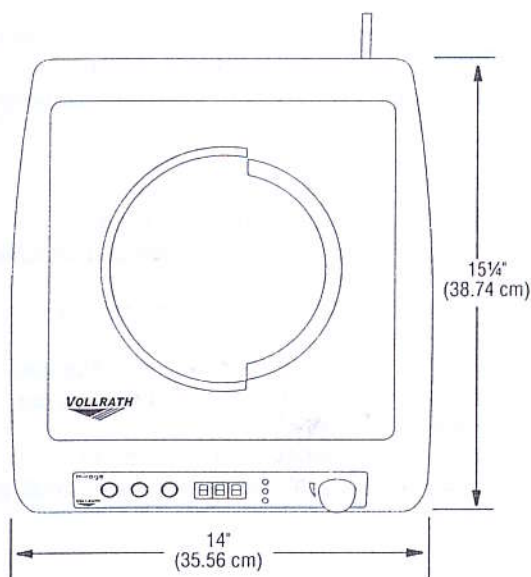


Unit shown with ½" (1.27 cm) feet.

ELECTRICAL SPECIFICATIONS - 1 PHASE, 60 HZ

Model	kW Rating	Volts	Nominal Amps	NEMA Plug
59650	1.8 kW	230V AC	7.8	Schuko
59651				UK
59652				China

Receptacles



www.vollrathco.com