


2560 Digital Refrigerator / Freezer Thermometer

The 2560 is a low temperature digital thermometer designed to hang or stand within the food zone inside cold storage cabinets. This is one of the most accurate refrigerator / freezer instruments with a specification of $\pm 1^\circ\text{F}$ ($\pm 0.5^\circ\text{C}$), and is guaranteed accurate for life. The large easy-to-read display also has freezer temperature symbols that display incrementally to indicate freezer temperatures between 21.2° to -4°F (-6° to -20°C). The 2560 is $^\circ\text{F}$ / $^\circ\text{C}$ selectable with minimum and maximum temperature recall modes. The unique ABS plastic frame design is removable for easy cleaning. Both the thermometer and the frame are water-resistant and incorporate an anti-microbial additive that prevents the growth of bacteria.



FREEZER SYMBOL TEMPERATURE RANGES			
21.2°F (-6°C)	*	*	*
10.4°F (-12°C)	*	*	*
-0.4°F (-18°C)	*	*	*
-4°F (-20°C)	*	*	*

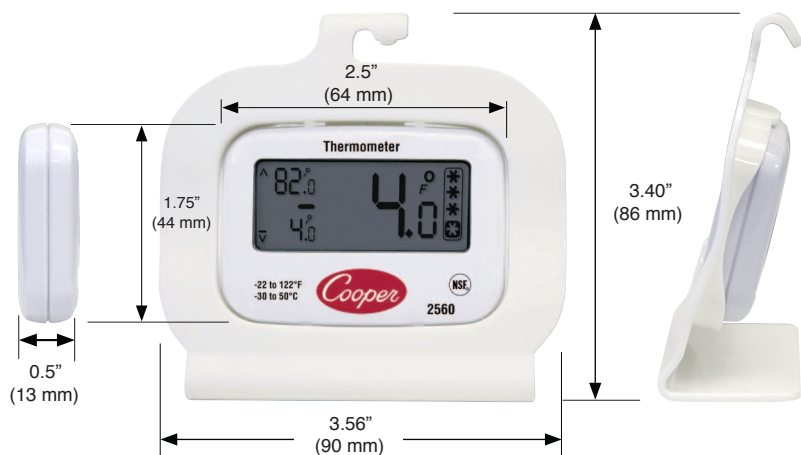

Specifications

- Temperature Range: -22° to 122°F (-30° to 50°C)
- Accuracy: $\pm 1^\circ\text{F}$ / 0.5°C from -4° to 50°F (-20° to 10°C)
 $\pm 1.8^\circ\text{F}$ ($\pm 1^\circ\text{C}$) otherwise
- Resolution: 0.1°
- Response Time: 30 second updates
- Water-resistant
- FDA-approved ABS plastic housing with anti-microbial additive
- Display: $1.875'' \times .75''$ ($48 \times 19 \text{ mm}$)
- Battery Life: 200 days, (1) 3V, CR2032 (included)
- Lifetime warranty (Accurate for Life)

LIFETIME WARRANTY INCLUDES CALIBRATION
ACCURACY: Any Afl designated instrument which proves to measure temperatures out of the specified accuracy range, or be defective in material or workmanship, will be replaced without charge upon receipt of the unit prepaid.



Packaging

- Individual Package Weight: 4 oz. (113 g)
- Package Dimensions (L x W x H): $5'' \times 1.75'' \times 7.25''$ ($127 \times 45 \times 184 \text{ mm}$)
- Package Cube: 0.4



Still straining to read those
Bi-metal dial thermometers?
Try our **NEW**, easy-to-read
DIGITAL 2560!



Measuring Success Since 1885
Cooper-Atkins Corporation • 800-835-5011 • 860-347-2256 • www.cooper-atkins.com

67-1167
V1111