



SIMPLE,  
FAST AND  
**RELIABLE**

ComBi-line  
5, 10 and 20 litres  
*Professional filter coffee.*

**ANIMO**

# ANIMO COMBI-LINE

Simple, fast and reliable! With the ComBi-line brewing unit, you can brew a full container of tasty filter coffee within 15 minutes. Available with one or two containers of 5, 10 or 20 litre. With or without hot water dispenser in the brewing unit.

## *Professional filter coffee.*

### PLUG AND PLAY

ComBi-line comes ready and pre-assembled. Choose your language, set the timer and turn on the tap. You're all set and ready to go!



### CN CONTAINERS

- + Isolated and stackable. Available for the brewing unit in 5, 10 or 20 litre version.
- + Electrical (CNe) or Insulated (CNi) models. CNe models have LED-lighting.
- + CNi models are dishwasher proof.
- + Insulated lid to keep the beverage on perfect temperature.
- + Improved heating. No hot spots.

### USEFUL ACCESSORIES

- + Filling hose
- + Flexible quick-fill hose
- + S-tap
- + ...and many more!

### TOP FILTER

The fixed basket filter is 50% lighter than the stainless steel filter. Its double walls prevent the outside from becoming too hot. And it's dishwasher proof.

### PROTECTIVE CAP

Made of aluminium. Behind the cap, each container has one extra gauge glass. Always ready for operation!

### HOT WATER DISPENSER

All W models are supplied with a hot water dispenser in the brewing unit.

- + Energy saving mode
- + Insulated boiler
- + High capacity of hot water



- + Raised base plate (accessory). Easy when using large thermos jugs.

- + Display your private label on-screen



### CAPACITIVE TOUCH USER INTERFACE


The touch technology provides a very intuitive user interface. Just set the recommended quantity of coffee and follow the brewing process on-screen. A signal and display notification tells you when your coffee is ready and there you are!

- + Operator and service menu
- + Programmable timers
- + Coffee dosing advice
- + Day and total counters



### COVER

Stainless steel, double walled and insulated. Robust and slosh safe!

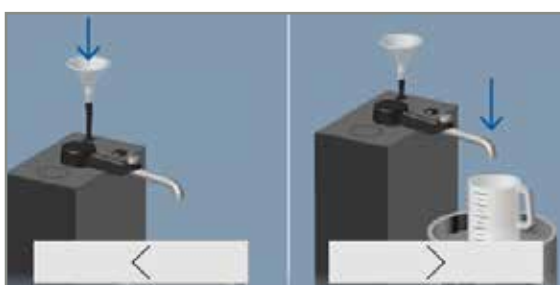

### EASY MAINTENANCE

Easy on-screen instructions (for example descaling the machine)

### NEW TAP

For different labels: coffee, tea or hot water

### VERY SAFE TO USE

- + Swivel arm detection
- + Swivel arm protection
- + CB Certification (TÜV)



### TEA

Filling tube and tea filter.  
For delicious tea instead of coffee.



# COMBI-LINE SPECIFICATIONS

## WORKTOP SET-UP

	CB 2x5	CB 2x5W	CB 1x5 L/R	CB 1x5W L/R	CB 2x10	CB 2x10W
Article number	1005390	1005394	L:1005392 R:1005391	L:1005396 R:1005395	1005398	1005402
Buffer stock coffee/tea	10 l, 80 cups	10 l, 80 cups	5 l, 40 cups	5 l, 40 cups	20 l, 160 cups	20 l, 160 cups
Hour capacity coffee/tea*	abt. 30 l, 240 cups	abt. 30 l, 240 cups	abt. 30 l, 240 cups	abt. 30 l, 240 cups	abt. 60 l, 480 cups	abt. 60 l, 480 cups
Boiler content	-	4,2 l	-	4,2 l	-	5,6 l
Hour capacity hot water	-	33 l	-	33 l	-	60 l
Water dispensing in 1 run	-	2,6 l	-	2,6 l	-	4,1 l
Electrical connection	1N~220-240V 3175W, 50-60C <sub>y</sub>	1N~220-240V 3475W, 50-60C <sub>y</sub>	1N~220-240V 3125W, 50-60C <sub>y</sub>	1N~220-240V 3125W, 50-60C <sub>y</sub>	3N~380-415V 6275W, 50-60C <sub>y</sub>	3N~380-415V 6275W, 50-60C <sub>y</sub>
Dimensions (WxD(xD1**)*xH)	815x470(330)x700	815x470(330)x700	505x470(330)x700	505x470(330)x700	980x470(330)x790	980x470(330)x790
Tap outflow height	185 mm	185 mm	185 mm	185 mm	185 mm	185 mm
Holding temperature	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C
Water dosing time	abt. 10 min/5 l	abt. 10 min/5 l	abt. 10 min/5 l	abt. 10 min/5 l	abt. 10 min/10 l	abt. 10 min/10 l
Filter paper	101/317	101/317	101/317	101/317	152/457	152/457

	CB 1x10 L/R	CB 1x10W L/R	CB 2x20	CB 2x20W	CB 1x20 L/R	CB 1x20W L/R
Article number	L:1005400 R:1005399	L:1005404 R:1005403	1005406	1005410	L: 1005408 R:1005407	L:1005412 R:1005411
Buffer stock coffee/tea	10 l, 80 cups	10 l, 80 cups	40 l, 320 cups	40 l, 320 cups	20 l, 160 cups	20 l, 160 cups
Hour capacity coffee/tea*	abt. 60 l, 480 cups	abt. 60 l, 480 cups	abt. 90 l, 720 cups	abt. 90 l, 720 cups	abt. 90 l, 720 cups	abt. 90 l, 720 cups
Boiler content	-	5,6 l	-	5,6 l	-	5,6 l
Hour capacity hot water	-	60 l	-	60 l	-	60 l
Water dispensing in 1 run	-	4,1 l	-	4,1 l	-	4,1 l
Electrical connection	3N~380-415V 6175W, 50-60C <sub>y</sub>	3N~380-415V 6175W, 50-60C <sub>y</sub>	3N~380-415V 9275W, 50-60C <sub>y</sub>	3N~380-415V 9275W, 50-60C <sub>y</sub>	3N~380-415V 9175W, 50-60C <sub>y</sub>	3N~380-415V 9175W, 50-60C <sub>y</sub>
Dimensions (WxD(xD1**)*xH)	590x470(330)x790	590x470(330)x790	1095x500(360)x895	1095x500(360)x895	645x500(360)x895	645x500(360)x895
Tap outflow height	185 mm	185 mm	185 mm	185 mm	185 mm	185 mm
Holding temperature	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C	abt. 80-85°C
Water dosing time	abt. 10 min./10 l	abt. 10 min./10 l	abt. 14 min./20 l	abt. 14 min./20 l	abt. 14 min./20 l	abt. 14 min./20 l
Filter paper	152/457	152/457	203/533	203/533	203/533	203/533

# ANIMO

We make coffee machines and equipment for people who want to serve good coffee. User-friendly machines with a variety of options that are durable and convenient to maintain. Our machines deliver a wide range of fresh, hot beverages time after time. Everything from freshly ground espresso, cappuccino or latte macchiato to tea, hot chocolate and instant soup.

We've been doing business for over 65 years in more than 75 countries worldwide. Because good coffee takes a good machine. And a good machine takes experience, expertise and dedication.

Animo B.V.  
Headquarters  
Assen - Netherlands

Sales Netherlands  
Export Department  
info@animo.nl  
+31 (0)592 376 376

Animo B.V.B.A. Belgium  
info@animo.be  
+32 (0)33 130 308

Animo France  
info@animo-france.fr  
+33 (0) 3 80 25 06 60

Animo GmbH, Germany  
info@animo-gmbh.de  
+49 (0)541 971 250

DEDICATED TO EVERY CUP

