

和面机 HERCULES



HERCULES

- 由厚实的 C40 钢制造而成，涂层抗刮；
- 304 不锈钢容器及和面杆；
- 锻造而成的螺旋形搅拌器；
- 加强型链传动；
- 强力风冷马达；
- IP67 保护级控制；
- TA 系列的头部可抬起；
- 可选件：滚轮。

HERCULES BIGA

- 由厚实的 C40 钢制造而成，涂层抗刮；
- 304 不锈钢容器及和面杆；
- 锻造而成的螺旋形搅拌器；
- 加强型链传动；
- 两个强力风冷马达；
- 两种速度设置；
- 容器可反向转动，促进水和面粉的充分吸收；
- 数显控制面板；
- IP67 保护级控制；
- 头部可抬起；
- 可选件：滚轮。

HERCULES

- Thick C40 steel body with scratch-resistant coating
- AISI 304 stainless steel bowl and shaft
- Forged spiral
- Reinforced chain drive
- Powerful ventilated motor
- IP67 low voltage controls
- Lifiable head on TA version
- Wheels set available

HERCULES BIGA

- Thick C40 steel body with scratch-resistant coating
- AISI 304 stainless steel bowl and shaft
- Forged spiral
- Reinforced chain drive
- Two powerful ventilated motor
- Dedicated tank motor with inversion to facilitate the absorptions of water and flour
- Two different speed settings
- Control panel with digital display
- Two different speed settings with reverse mode for tank
- Lifiable head
- Wheels set available



YOUKU 优酷



Hercules Biga 控制面板

BIGA 是意大利烘焙中的一种预发酵方式，其做出的面包比用普通的发酵剂口感更丰富、更浓厚。将面粉、水和酵母以一定比例混合，经过所需的发酵时间后，再与其它原材料相混合，以获得既脆又香的面包，最典型的例子就是“ciabatta”面包。


BIGA is a kind of pre-fermentation use in Italian baking. Bigas are usually considered thicker and richer than normal dough starter. Strong types of flours are mixed with water and yeast in a fixed percentage in order to maintain a good balance between resistance and elasticity. After the desired fermentation time is passed it is ready to be mixed to other ingredients to obtain bread that is both crispier and richer in taste. A typical example is the "ciabatta" bread



加强型搅拌杆



可选件：滚轮

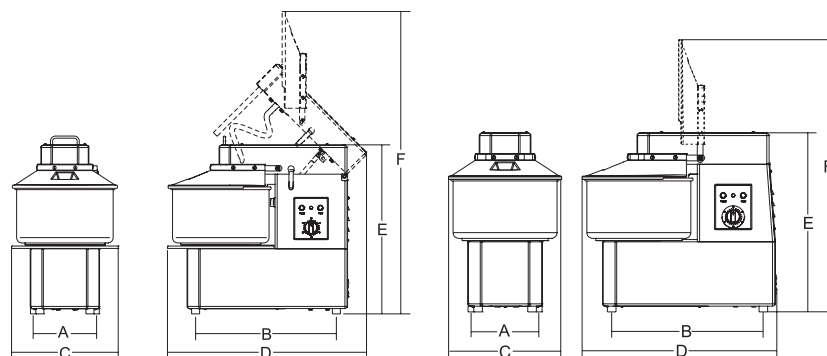

产品型号	功率	电源	容器转速	和面杆转速	容器容量	最大加入量	容器尺寸	A	B	C	D	E	F	净重	包装尺寸	毛重
	W / Hp		r.p.m.	r.p.m.	L	kg	mm	mm	mm	mm	mm	mm	mm	kg	mm	kg
HERCULES 5	370/0.5	230V / 50Hz 单相	13	83	7	4	265 x 140	220	410	280	505	440	670	36	500 x 630 x 650	42
HERCULES 20 B	750/1	230V / 50Hz 单相	10	85	21	17	360 x 210	230	530	390	680	625	950	66	530 x 830 x 1020	76
HERCULES 30 TA	1100/1.5	230V / 50Hz 单相	10	85	32	25	400 x 260	270	590	440	823	710	1260	109	530 x 830 x 1020	119
HERCULES 40 TA	1500/2	400V / 50Hz 三相	10	85	41	35	452 x 260	310	660	490	910	740	1360	125	630 x 970 x 1070	135
HERCULES 40 BIGA	1500/2	400V / 50Hz 三相	10	82 / 165	41	35	452 x 260	377	630	434	823	705	1115	125	630 x 970 x 1070	135