



VEGETABLE CUTTER #48



Internationally
patented models




The best value for money

Perfect for restaurants, sandwich shops, and brasseries, this compact table-top model will fit in the smallest kitchens.

It is perfect for cutting, slicing, grating and shredding all kinds of vegetables and fruits.

It is delivered with 3 standard discs, and a wide range of discs is available in option.

Robust thanks to its aluminum casting body and powerful motor, it is also easy to use and clean.

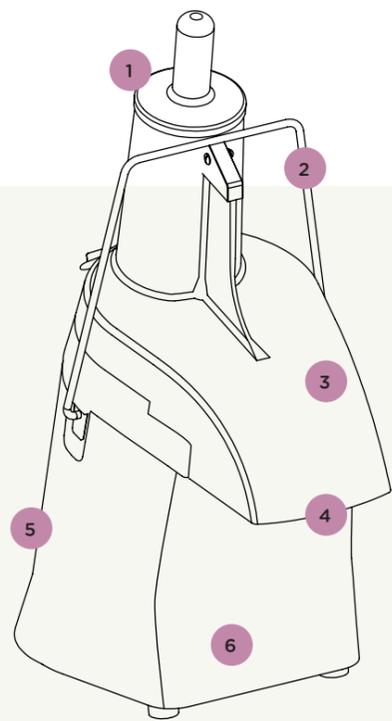

 50 kg/h

- 1 **Wide feeding chute** (Ø75mm / 3")
- 2 **Locking system:** brake stopping the motor and disc when opening the handle
- 3 **Removable top cover**
- 4 **Average output:** 50 kg/hour
- 5 **Commercial asynchronous motor**
- 6 **Aluminium base**

Easy to use and clean



- Removable top cover, disc and rubber ejector
- Easy and quick change of cutting discs
- Dishwasher safe cutting discs



A wide range of discs to grate, cut, slice, and shred

<p>Slicer from 1 to 6mm</p> 	<p>Tomato Slicer 4 and 6mm</p> 	<p>Ondulated Slicer 4mm</p> 	<p>The vegetable slicer #48 is delivered with 3 discs: Slicer T3, Grater R3, Shredder E8</p>
<p>Grater 2, 3, 4mm</p> 	<p>Parmesan Grater powder</p> 	<p>Rösti Grater rösti</p> 	

Safety, standards, hygiene

In accordance with the following regulations Machinery directive 2006 / 42 / EC
 Electromagnetic compatibility 2014 / 30 / EU
 "Low voltage" directive 2014 / 35 / EU
 RoHS directive 2011 / 65 / EU
 Regulation 1935 / 2004 / EC (contact with food)
 Regulation 10 / 2011 / EU (Plastic in contact with food)

Harmonized European Standards EN ISO 12100: 2010
 EN 60204-1 + A1: 2009
 EN 60335-2-64: 2004 Commercial electric kitchen machines
 EN 1678 + A1: 2010 Food processing machinery Vegetable cutting machines
 CE Marking

Electrical Safety On/Off interlock switch is waterproof
 All mechanical parts are ground connected
 Appliances are 100% tested after assembly

Thermal Safety Motor protected by internal thermal detector


Acoustic Safety Very silent and powerful asynchronous motor

Hygiene All removable parts can be put in a dishwasher or easily cleaned with hot soapy water.

Technical specifications

Motor
 Single phase:
 220-240 V - 50/60 Hz - 390 W - CE

Speed:
 1 000 rpm (50Hz)
 1 200 rpm (60 Hz)

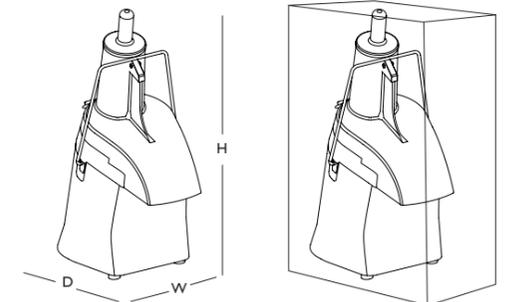

Appliance
 w: 420 mm (17")
 D: 250 mm (10")
 H: 520 mm (20")

Weight:
 17,4 Kg (37 lbs)

Shipping box
 W: 480 mm (12")
 D: 300 mm (18")
 H: 560 mm (16")

Weight:
 19,1 Kg (42 lbs)

PRODUCT: 2 YEAR WARRANTY | MOTOR: 5 YEARS